

Service data sheet (10019003)

SIA AMAZONE

Deksnes iela 9, Deksne - Padures pag.

LV - 3301 Kuldigas novads

Date of test :

2014-09-24

Material : **УРАЛХИМ Азотофосфат 33:3 круглый**

Material producer : Kirovo Chepetsky

Machine type : ZATS

Grain diameter : 2,44 mm

Drop angle : 218,33 °



Bulk density : 0,96 kg/l

Flow rate : 6,75 kg/min


Material ID : 431550

Material test ID : 83010147

Operator : ubuecker

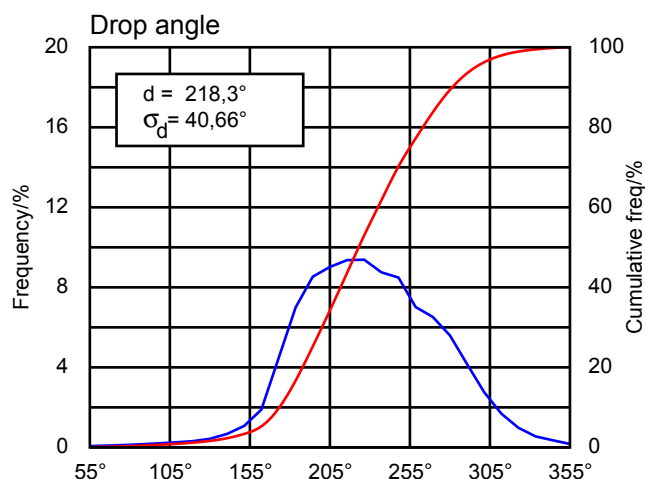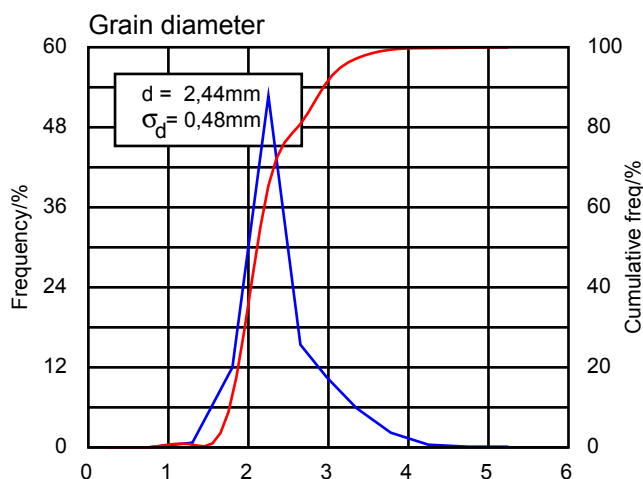


Material data (Ammonium Nitrate)

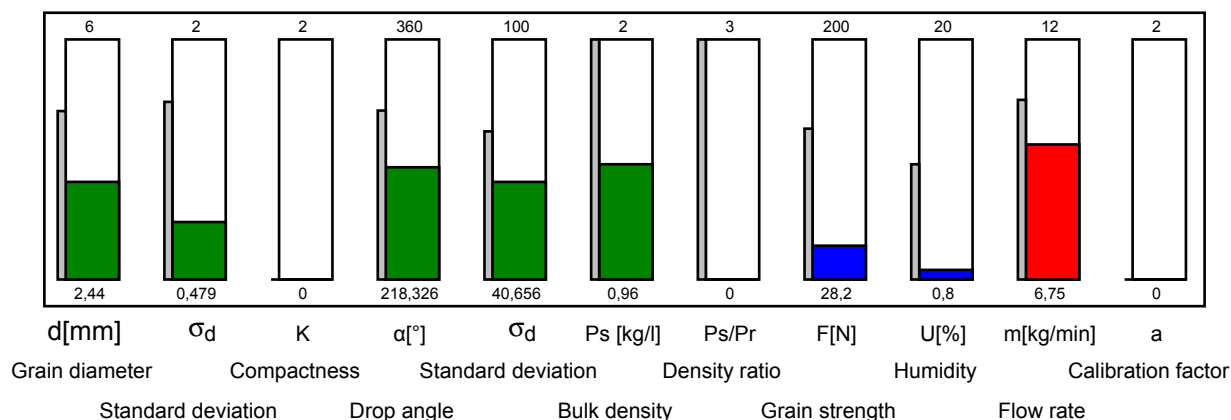


Comment : ZA-TS

Attention! We never spread a fertiliser with similar data. An additional cross-check on a mobile test kit is recommended

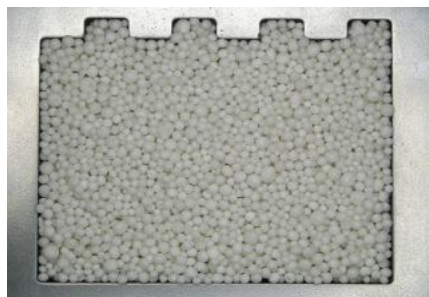

УРАЛХИМ Азотофосфат 33:3 круглый
(83010147)



2,44mm



0,96kg/l

Calibration factor **1,30**

Attention! The stated settings are based on a 3kg sample test

ZA-TS														
TS 1	18.0	43	600	A	3	720	2	20	600	3	30	500	16	1
	20.0	52	600	A	3	720	2	20	600	3	30	500	19	2
	21.0	54	600	A	3	720	2	20	600	3	30	500	19	2
TS 2	24.0	24	600	B	2	720	2	20	600	2	30	500	21	2
	27.0	31	600	B	3	720	3	20	600	3	30	500	22	3
	28.0	32	600	B	3	720	3	20	600	3	30	500	22	5
	30.0	31	720	B	3	800	3	20	720	3	30	600	25	4
	32.0	32	800	B	3	800	3	20	720	3	30	600	27	4
	33.0	35	800	B	3	900	3	20	800	3	30	720	27	5
	36.0	40	900	B	3	900	3	20	900	3	30	800	29	6
TS 3	32.0	33	800	C	3	900	3	20	800	3	40	720	29	3
	33.0	33	800	C	3	900	3	20	800	3	40	720	29	3
	36.0	37	900	C	3	950	3	35	900	3	40	800	31	4
	39.0	39	900											
	40.0	39	900											
	42.0	42	900											
	44.0	45	900											
	45.0	47	900											

Please note for your information: Even if the results of the tested fertiliser sample suggest a definitive recommendation as to the settings on the fertiliser spreader, it is not possible for AMAZONE to unequivocally guarantee the actual distribution in the field. For besides the physical properties of the fertiliser, the distribution depends on other additional factors, such as storage of the product between the testing and spreading, the setting and the level of maintenance on the spreader, or its actual operation by the tractor driver. We therefore recommend that the settings are verified in the field by the use of, for example, the mobile test kit.