

Service data sheet (10030436)

SIA AMAZONE

Deksnes iela 9, Deksne - Padures pag.

LV - 3321 Kuldigas novads

Date of test :

2017-03-15

Material : **60er Kali "rot" URALKALI**

Material producer : URALKALI - Belarusian Potash Company JSC

Material ID : 432311

Machine type : ZATS

Material test ID : 83014749



Granule diameter : 2,95 mm

Operator : ubuecker


Drop angle : 227,65 °

Bulk density : 1,13 kg/l

Flow rate : 6,12 kg/min

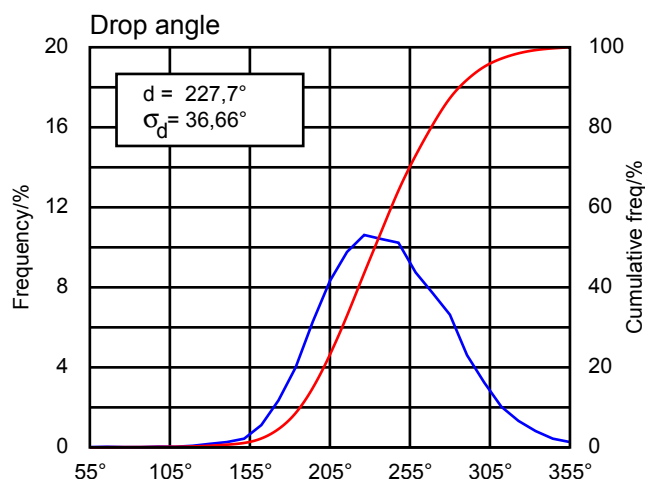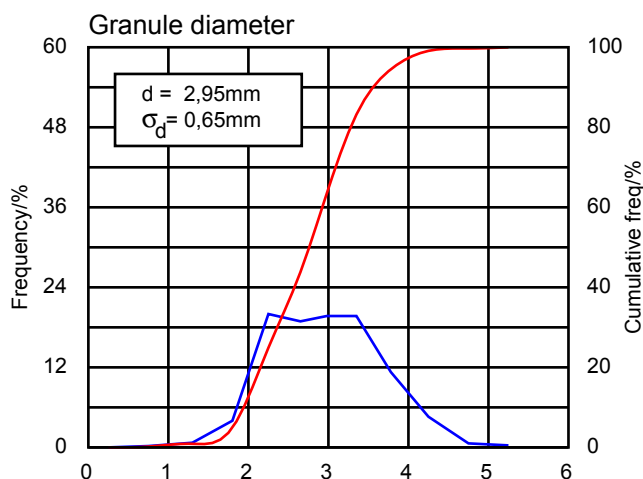

Material data (Potash)

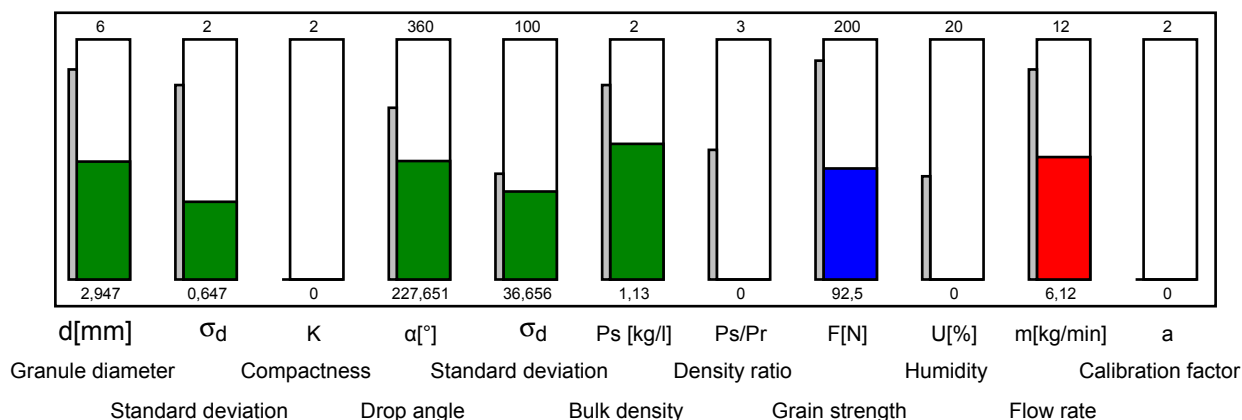

Comment : TS-System

Attention! An additional cross-check on a mobile test kit and a spread rate check is recommended.




60er Kali "rot" URALKALI

(83014749)



2,95mm



1,13kg/l

Calibration factor 1,00

Attention! The stated settings are based on a 3kg sample test

ZA-TS / ZG-TS															
															
TS 1	15.0	22	720	A	1	720	1	26	600	1	36	500	19	-3	204
	16.0	22	720	A	1	720	1	25	600	1	35	500	18	-2	204
	18.0	23	720	A	1	800	1	24	720	1	34	600	19	-1	214
	20.0	28	800	A	1	800	1	23	720	1	33	600	20	0	252
	21.0	28	800	A	1	800	1	23	720	1	33	600	20	1	252
	24.0	35	800	A	1	900	1	21	800	1	31	720	21	3	322
TS 2	24.0	0	800	D	X	720	1	25	800	1	35	720	24	0	259
	27.0	3	800	D	X	720	1	23	800	1	33	720	25	2	289
	28.0	4	800	D	X	720	1	23	800	1	33	720	25	3	299
	30.0	5	900	D	X	800	1	22	900	1	32	800	27	3	302
	32.0	9	900	D	X	800	1	22	900	1	32	800	27	5	342
	33.0	10	900	D	X	800	1	21	900	1	31	800	27	5	352
TS 3	24.0	0	720	C	3	800	3	24	720	3	34	600	25	-1	256
	27.0	3	720	D	X	600	1	22	720	1	32	600	26	2	286
	28.0	4	720	D	X	600	1	21	720	1	31	600	26	2	296
	30.0	6	800	D	X	720	1	21	800	1	31	720	26	4	315
	32.0	9	800	D	X	720	2	21	800	2	31	720	27	5	344
	33.0	10	800	D	X	720	2	20	800	2	30	720	27	6	355
	36.0	12	900	D	X	800	2	21	900	2	31	800	29	7	400

Please note for your information: Even if the results of the tested fertiliser sample suggest a definitive recommendation as to the settings on the fertiliser spreader, it is not possible for AMAZONE to unequivocally guarantee the actual distribution in the field. For besides the physical properties of the fertiliser, the distribution depends on other additional factors, such as storage of the product between the testing and spreading, the setting and the level of maintenance on the spreader, or its actual operation by the tractor driver. We therefore recommend that the settings are verified in the field by the use of, for example, the mobile test kit.