

Service data sheet (10030457)

SIA AMAZONE

Deksnes iela 9, Deksne - Padures pag.

LV - 3321 Kuldigas novads

Date of test :

2017-03-16

Material : **NPK 9-25-25 Phosagro / Cherepovets**

Material producer : LLC Agro Cherepovets

Machine type : ZATS

Granule diameter : 3,29 mm

Drop angle : 214,70 °



Bulk density : 1,03 kg/l

Flow rate : 5,68 kg/min


Material ID : 432524

Material test ID : 83014744

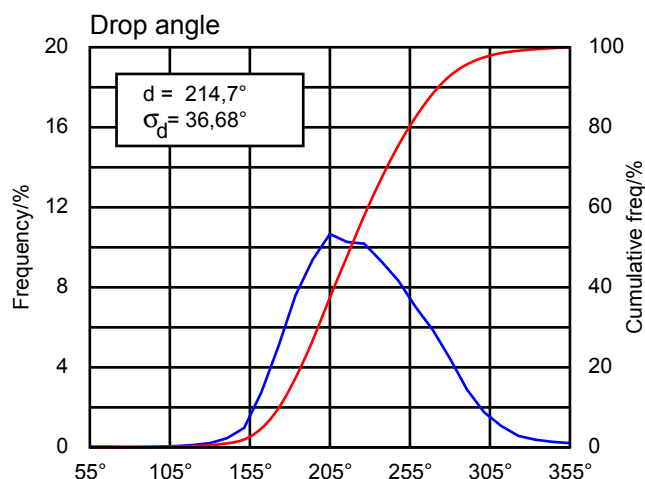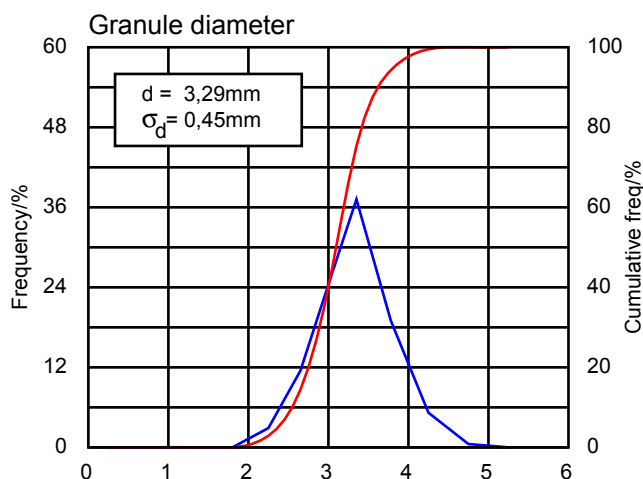Operator : ubuecker



Material data (NPK fertilizers)

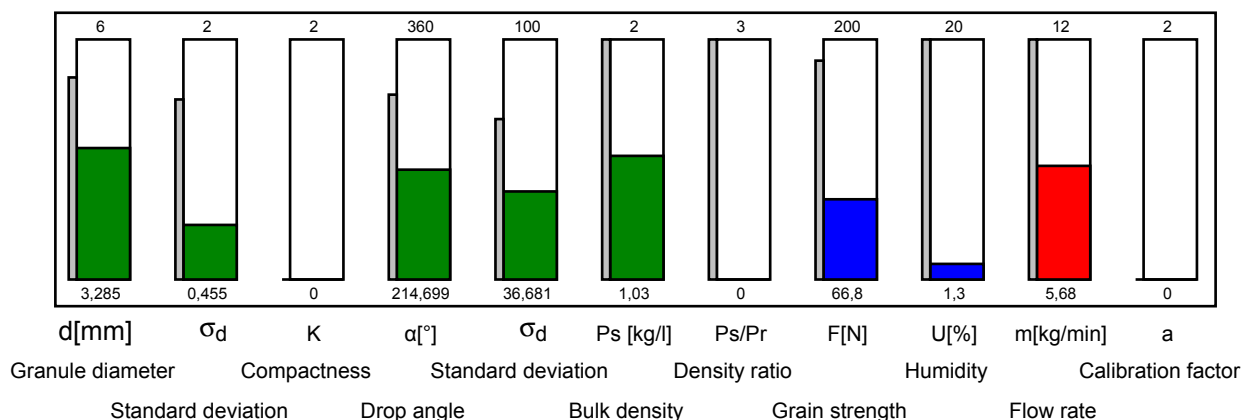

Comment : TS-system

Attention! An additional cross-check on a mobile test kit and a spread rate check is recommended.















NPK 9-25-25 Phosagro / Cherepovets
(83014744)

→  mm **3,29mm**

 **1,03kg/l**

Calibration factor **1,16**

Attention! The stated settings are based on a 3kg sample test

ZA-TS / ZG-TS															
															
TS 1	15.0	48	600	A	1	600	1	22	500	1	32	400	20	-5	202
	16.0	48	600	A	1	600	1	21	500	1	31	400	20	-3	202
	18.0	48	600	A	1	720	1	20	600	1	30	500	20	-1	202
	20.0	50	720	A	1	720	1	19	600	1	29	500	23	-3	212
	21.0	50	720	A	1	720	1	19	600	1	29	500	23	-2	212
	24.0	54	800	A	1	800	1	19	600	1	29	500	26	-2	243
TS 2	24.0	29	900	B	2	900	2	23	800	2	33	720	31	-5	204
	27.0	29	900	B	2	900	2	21	800	2	31	720	33	-5	204
	28.0	29	900	B	2	900	2	21	800	2	31	720	34	-5	204
	30.0	29	900	D	X	720	1	19	800	1	29	720	34	-3	204
	32.0	27	900	D	X	720	1	18	800	1	28	720	34	-2	184
	33.0	29	900	D	X	800	1	19	900	1	29	800	34	-1	204
TS 3	24.0	26	720	C	2	720	2	21	600	2	31	500	31	-5	184
	27.0	26	720	C	2	800	2	19	720	2	29	600	33	-5	184
	28.0	26	720	C	2	800	2	19	720	2	29	600	33	-5	184
	30.0	27	720	C	3	800	3	18	720	3	28	600	33	-3	194
	32.0	28	800	C	3	900	3	18	800	3	28	720	35	-3	180
	33.0	28	800	C	3	900	3	18	800	3	28	720	35	-2	180
	36.0	30	900	C	3	900	3	18	800	3	28	720	38	-2	201

Please note for your information: Even if the results of the tested fertiliser sample suggest a definitive recommendation as to the settings on the fertiliser spreader, it is not possible for AMAZONE to unequivocally guarantee the actual distribution in the field. For besides the physical properties of the fertiliser, the distribution depends on other additional factors, such as storage of the product between the testing and spreading, the setting and the level of maintenance on the spreader, or its actual operation by the tractor driver. We therefore recommend that the settings are verified in the field by the use of, for example, the mobile test kit.